


# ASTRA "SP" version

## Air operated double diaphragm pumps

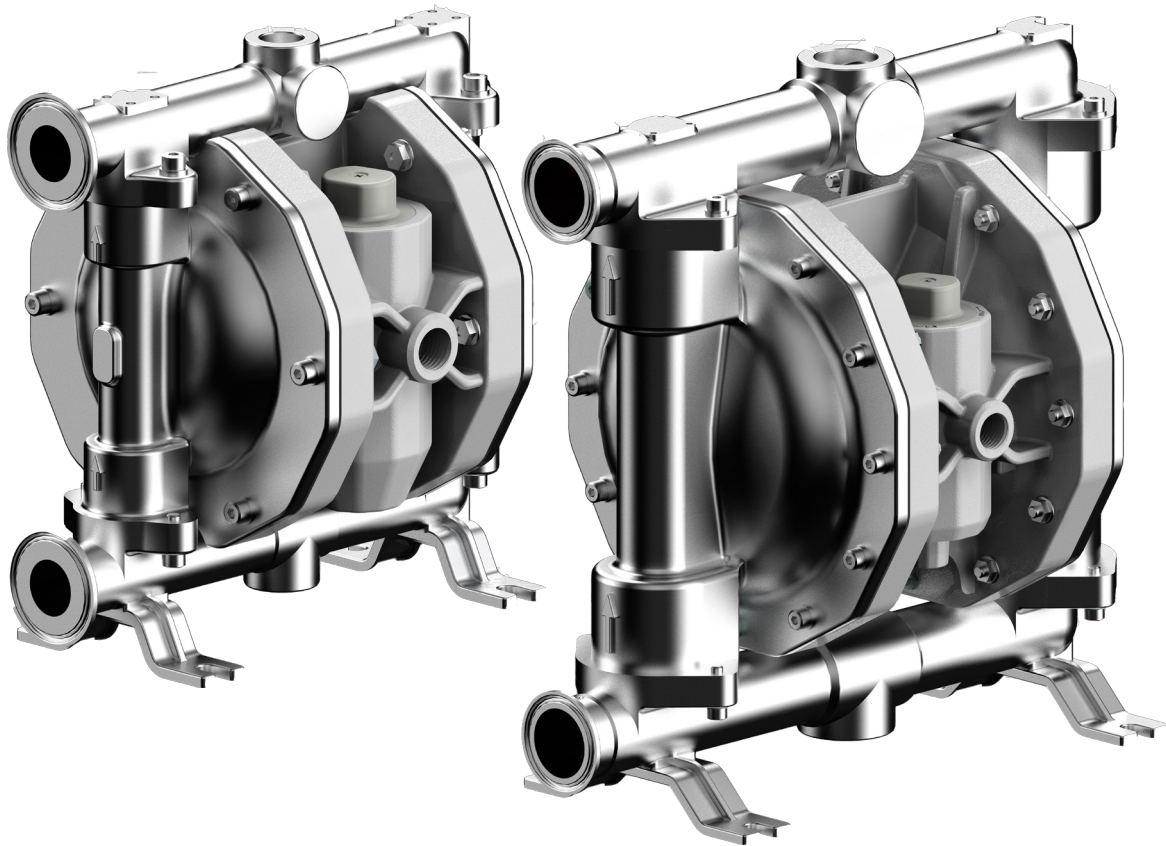

**ASTRA "SP"** diaphragm pneumatic pumps are manufactured fulfilling FDA requirements. All materials in contact with the liquid are realized according to FDA requirements. The whole range is in AISI 316 electro-polished according to the International Provision ASTM A380 and the medium roughness is 2,7 µm.

Model	Connections		Flow rate max	Head max	max Ø passing solids	Weight
	inlet / outlet	air connection	[ l/min]	[m]	[mm]	[Kg]
<b>DDA 50C</b>	CLAMP 1"	1/2"	50	70	3	6
<b>DDA 75 SP</b>	CLAMP 1"	1/2"	100	70	3,5	9
<b>DDA 125 SP</b>	CLAMP 1 1/2"	1/2"	250	70	7,5	20
<b>DDA 150 SP</b>	CLAMP 2"	3/4"	500	70	8,5	58
<b>DDA 200 SP</b>	CLAMP 2 1/2"	3/4"	680	70	8,5	60



Via Labirinto, 159 - 25125 BRESCIA - ITALY  
 Tel. +39.030.3507011 - Fax +39.030.3507077 -  
 Export dpt. Tel. +39.030.3507033  
 Web: [www.argal.it](http://www.argal.it) - E-mail: [export@argal.it](mailto:export@argal.it)

*It is the policy of ARGAL to always improve its products and the right is reserved to alter specifications at any time without prior notice.  
 No part of this publication may be reproduced in any form or any means.*